


NPA-30 /NPA-60 / NPA-120

Mixer Amplifier with USB/SD/FM/Bluetooth (Tabletop)

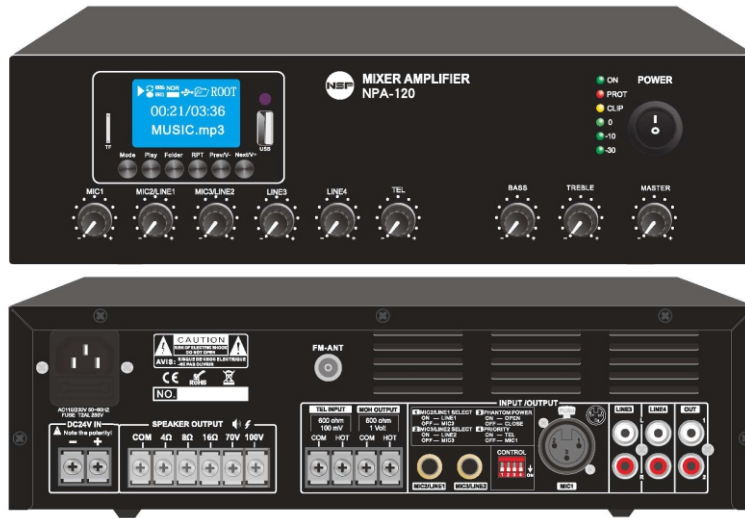

Characteristics:

- Compact mini size public address amplifier;
- Built-in 100V/70V transformer technology;
- Tabletop amplifier with MP3 player, FM radio & Bluetooth;
- Speaker output of 100V or 70V & 4Ohms,8 Ohms,16 Ohms;
- Mp3 player with USB/SD input on front panel, IR remote control for MP3 player, FM radio and Bluetooth;
- Mic1-3 and line 1-2 and telephone input;
- Mic2-3 microphone or line switchable unbalanced 6.3mm phone jack input;
Telephone input with VOX priority and MOH (Music on Hold);
- Volume control for Mic1-3, line1-2, Mp3/FM, bass/treble and master;
- With short-circuit, clip, overload and high temp protection;
- AC 110-240V & 24V DC both operation system.

Specifications:

Model	NPA-30	NPA-60	NPA-120
Rated Power Output	30W	60W	120W
Speaker Outputs	100V or 70V & 4Ohms-8 Ohms-16 Ohms		
Connector	Mic1 input by balanced XLR with phantom power Input2-3 inputs Mic/Line switchable unbalanced 6.3mm phone jack Line1-2 inputs by RCA; Line output by RCA		
Attenuation	Microphone1-3, line1-2 and Mp3/FM, bass/treble and master		
Input	MIC1-3: 5-8mV, 600Ω; Line, 150-470mV, 10KΩ, unbalanced RCA		
Line Out	0.775(0dBV)		
Frequency Response	60Hz-15kHz(±3dB)		
S/N Ratio	Line ≥ 85dB, Mic ≥ 72dB		
THD	Less than 0.5%		
Protection	short-circuit, clip, overload and high temp protection		
Power Consumption	60W	100W	200W
Power Supply	AC110-240V & 24V DC /50-60Hz		
Dimension	320×210×90 (WxDxH) (mm)		
Weight	3.7kg	4.3kg	4.9kg